

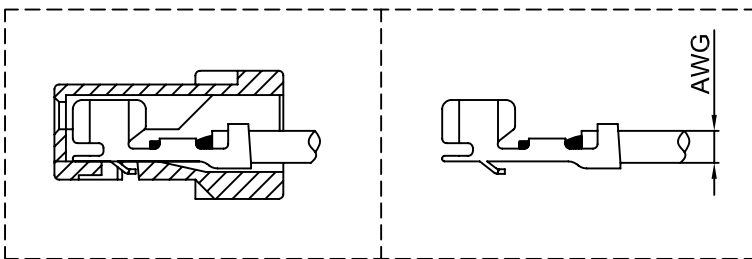
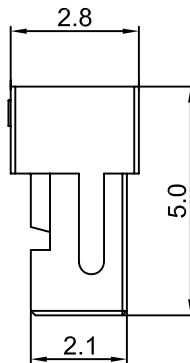



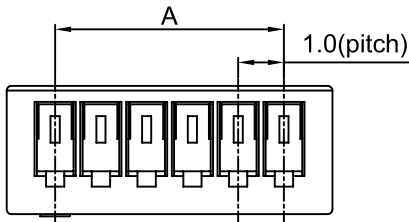

Wire to Board  
Connectors

Housing 1W1001 Series

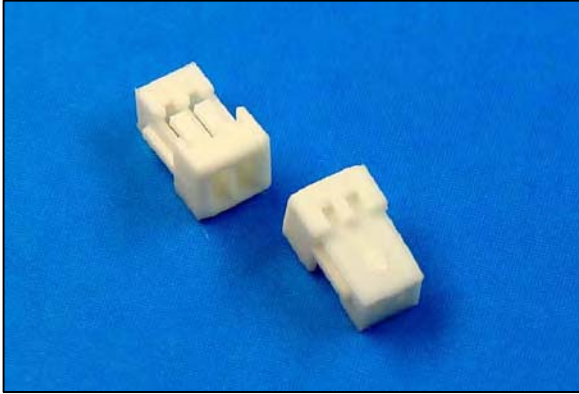

TERMINAL ASSEMBLY DRAWING

AWG:#28~#32

Specifications:

1W

- Rated Voltage: 50V AC,DC
- Rated Current: 1.0A AC,DC
- Withstand Voltage: 500V AC/Minute
- Contact Resistance: 20mΩ (Max.)
- Insulation Resistance: 100MΩ (Min.)
- Temperature Range: -25°C~+85°C

Material:

- Color: Natural
- P.B.T UL 94V-0

Use With:

- Use With: 1W1001TOP-2/5

Mates With:

- Mates With: 1W1001WOR0-XX  
1W1001WOV0-XX  
1W1001WOV0-XXC

Dimensional & Ordering Information :

Circuits	Parts No.	Dimension mm		Q'ty/ Bag
		A	B	
02	1W1001HO0-02N	1.0	5.0	1,000
03	1W1001HO0-03N	2.0	6.0	1,000
04	1W1001HO0-04N	3.0	7.0	1,000
05	1W1001HO0-05N	4.0	8.0	1,000
06	1W1001HO0-06N	5.0	9.0	1,000
07	1W1001HO0-07N	6.0	10.0	1,000
08	1W1001HO0-08N	7.0	11.0	1,000
09	1W1001HO0-09N	8.0	12.0	1,000
10	1W1001HO0-10N	9.0	13.0	1,000
11	1W1001HO0-11N	10.0	14.0	1,000
12	1W1001HO0-12N	11.0	15.0	1,000
13	1W1001HO0-13N	12.0	16.0	1,000
14	1W1001HO0-14N	13.0	17.0	1,000
15	1W1001HO0-15N	14.0	18.0	1,000
16	1W1001HO0-16N	15.0	19.0	1,000
17	1W1001HO0-17N	16.0	20.0	1,000
18	1W1001HO0-18N	17.0	21.0	1,000
19	1W1001HO0-19N	18.0	22.0	1,000
20	1W1001HO0-20N	19.0	23.0	1,000
21	1W1001HO0-21N	20.0	24.0	1,000
22	1W1001HO0-22N	21.0	25.0	1,000
23	1W1001HO0-23N	22.0	26.0	1,000
24	1W1001HO0-24N	23.0	27.0	1,000
25	1W1001HO0-25N	24.0	28.0	1,000
26	1W1001HO0-26N	25.0	29.0	1,000
27	1W1001HO0-27N	26.0	30.0	1,000
28	1W1001HO0-28N	27.0	31.0	1,000
29	1W1001HO0-29N	28.0	32.0	1,000
30	1W1001HO0-30N	29.0	33.0	1,000

N: Without Protrusions

UL: Recognized NO. E306230