




Wire to Board
Connectors

Housing 1W1001 Series

1W

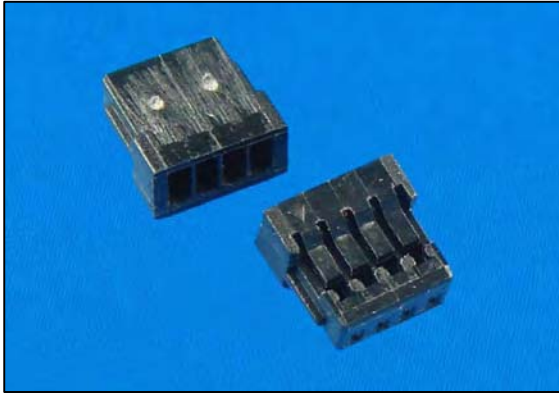

Specifications:

- Rated Voltage: 50V AC,DC
- Rated Current: 1.0A AC,DC
- Withstand Voltage: 500V AC/Minute
- Contact Resistance: 20mΩ (Max.)
- Insulation Resistance: 100MΩ (Min.)
- Temperature Range: -25°C~+85°C

Material:





- Color: Black
- P.B.T UL 94V-0

Use With:

- Use With: 1W1001TOP-2/5

Mates With:

- Mates With: 1W1001WOR0-XX
1W1001WOV0-XX
1W1001WOV0-XXC

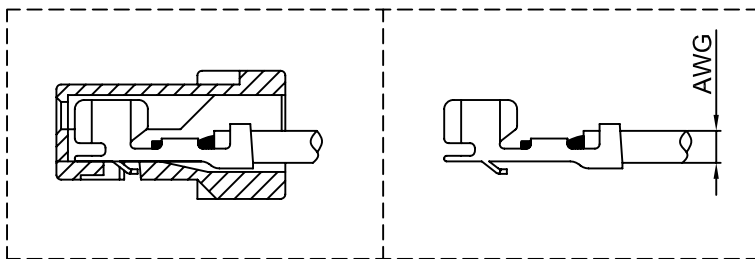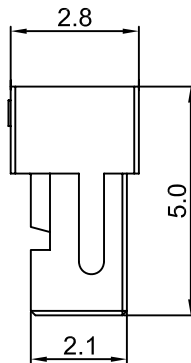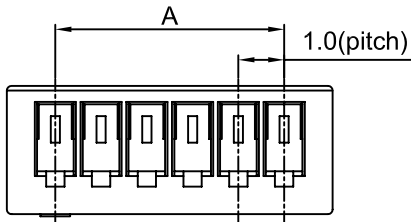

TERMINAL ASSEMBLY DRAWING

AWG:#28~#32

Dimensional & Ordering Information :

Circuits	Parts No.	Dimension mm		Q'ty/ Bag
		A	B	
02	1W1001HO0-02BN	1.0	5.0	1,000
03	1W1001HO0-03BN	2.0	6.0	1,000
04	1W1001HO0-04BN	3.0	7.0	1,000
05	1W1001HO0-05BN	4.0	8.0	1,000
06	1W1001HO0-06BN	5.0	9.0	1,000
07	1W1001HO0-07BN	6.0	10.0	1,000
08	1W1001HO0-08BN	7.0	11.0	1,000
09	1W1001HO0-09BN	8.0	12.0	1,000
10	1W1001HO0-10BN	9.0	13.0	1,000
11	1W1001HO0-11BN	10.0	14.0	1,000
12	1W1001HO0-12BN	11.0	15.0	1,000
13	1W1001HO0-13BN	12.0	16.0	1,000
14	1W1001HO0-14BN	13.0	17.0	1,000
15	1W1001HO0-15BN	14.0	18.0	1,000
16	1W1001HO0-16BN	15.0	19.0	1,000
17	1W1001HO0-17BN	16.0	20.0	1,000
18	1W1001HO0-18BN	17.0	21.0	1,000
19	1W1001HO0-19BN	18.0	22.0	1,000
20	1W1001HO0-20BN	19.0	23.0	1,000
21	1W1001HO0-21BN	20.0	24.0	1,000
22	1W1001HO0-22BN	21.0	25.0	1,000
23	1W1001HO0-23BN	22.0	26.0	1,000
24	1W1001HO0-24BN	23.0	27.0	1,000
25	1W1001HO0-25BN	24.0	28.0	1,000
26	1W1001HO0-26BN	25.0	29.0	1,000
27	1W1001HO0-27BN	26.0	30.0	1,000
28	1W1001HO0-28BN	27.0	31.0	1,000
29	1W1001HO0-29BN	28.0	32.0	1,000
30	1W1001HO0-30BN	29.0	33.0	1,000

NB: N:Without Protrusions; B:Black

UL: Recognized NO. E306230