



Board to Board
Connectors


Emboss
Type

SMT
Type

2B4001 Series
Wafer Vertical

Specifications:

2B

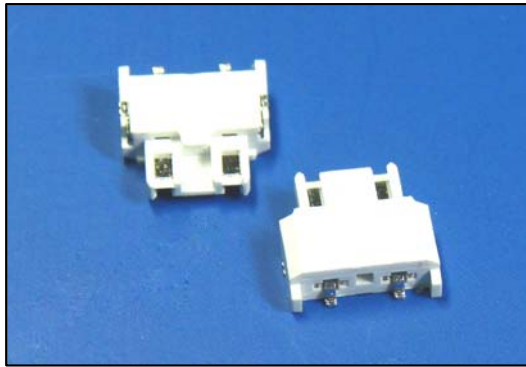





- Rated Voltage: 300V AC,DC
- Rated Current: 3.0A AC,DC
- Withstand Voltage: 1,700V AC/Minute
- Contact Resistance: 20mΩ (Max.)
- Insulation Resistance: 100MΩ (Min.)
- Temperature Range: -55°C~+105°C

Material:

- Base: High Temperature Plastic Natural UL 94V-0
- PIN: Phosphor Bronze, Tin-plated
- Solder tab: Phosphor Bronze, Tin-plated

Mates With:

- Mates With: 1W4001HO0-02K
2B4001WOF0-02

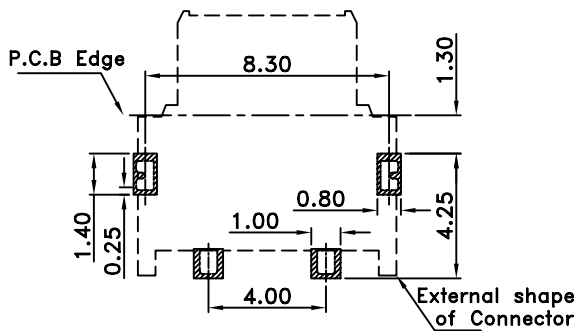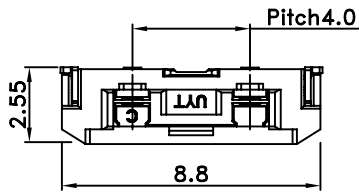

P.C.B LAYOUT

UL: Recognized NO. E306230