




Wire to Board  
Connectors

Emboss  
Type

SMT  
Type

1W0801 Series  
**Wafer** Right Angle

Specifications: 1W

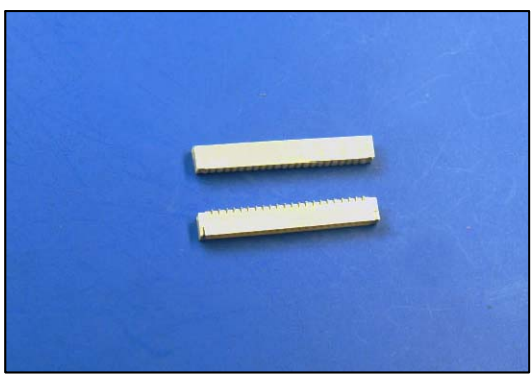


- Rated Voltage: 30V AC,DC
- Rated Current: 1.0A AC,DC
- Withstand Voltage: 200V AC/Minute
- Contact Resistance: 100mΩ (Max.)
- Insulation Resistance: 100MΩ (Min.)
- Temperature Range: -25°C~+85°C

**Material:**

- Base: High Temperature Plastic Natural UL 94V-0
- PIN: Phosphor Bronze, Tin-plated
- Solder tab: Phosphor Bronze, Tin-plated


**Mates With:**

- Mates With: 1W0801HO0-XX  
1W0801HO0-XXB  
1W0801HO0-XXN  
1W0801HO0-XXBN

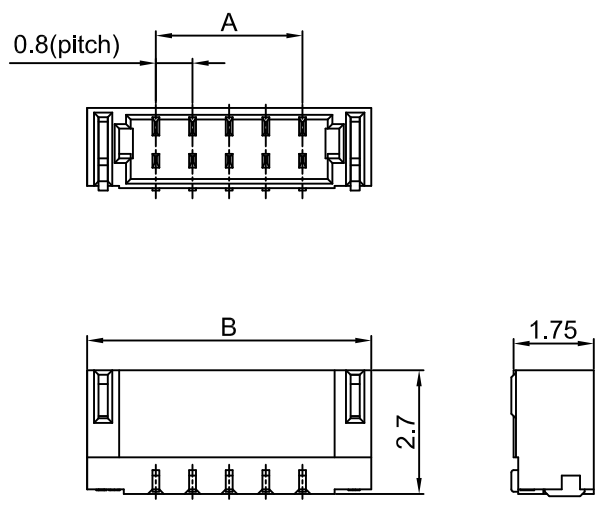

**Dimensional & Ordering Information :**

Circuits	Parts No.	Dimension mm		Reel/ Pcs
		A	B	
02	1W0801WOR0-02	0.8	3.8	4,000
03	1W0801WOR0-03	1.6	4.6	4,000
04	1W0801WOR0-04	2.4	5.4	4,000
05	1W0801WOR0-05	3.2	6.2	4,000
06	1W0801WOR0-06	4.0	7.0	4,000
07	1W0801WOR0-07	4.8	7.8	4,000
08	1W0801WOR0-08	5.2	8.2	4,000
09	1W0801WOR0-09	6.4	9.4	4,000
10	1W0801WOR0-10	7.2	10.2	4,000
11	1W0801WOR0-11	8.0	11.0	4,000
12	1W0801WOR0-12	8.8	11.8	4,000
13	1W0801WOR0-13	9.6	12.6	4,000
14	1W0801WOR0-14	10.4	13.4	4,000
15	1W0801WOR0-15	11.2	14.2	4,000
16	1W0801WOR0-16	12.0	15.0	4,000
17	1W0801WOR0-17	12.8	15.8	4,000
18	1W0801WOR0-18	13.6	16.6	4,000
19	1W0801WOR0-19	14.4	17.4	4,000
20	1W0801WOR0-20	15.2	18.2	4,000
21	1W0801WOR0-21	16.0	19.0	4,000
22	1W0801WOR0-22	16.8	19.8	4,000

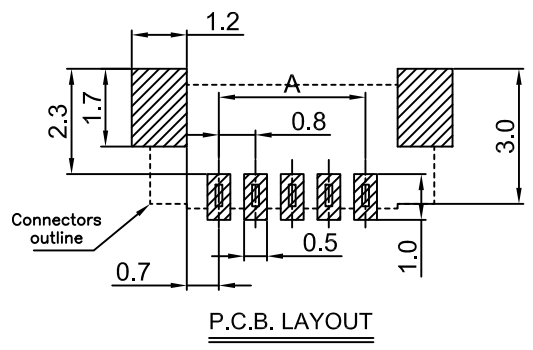

UL: Recognized NO. E306230