



Wire to Board  
Connectors

Housing 1W0801 Series

Specifications:

1W

- Rated Voltage: 30V AC,DC
- Rated Current: 1.0A AC,DC
- Withstand Voltage: 200V AC/Minute
- Contact Resistance: 100mΩ (Max.)
- Insulation Resistance: 100MΩ (Min.)
- Temperature Range: -25°C~+85°C

Material:






- Color: Natural
- P.B.T UL 94V-0

Use With:

- Use With: 1W0801TOP-2

Mates With:

- Mates With: 1W0801WOR0-XX  
1W0801WOV0-XX

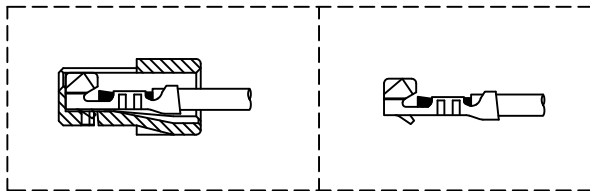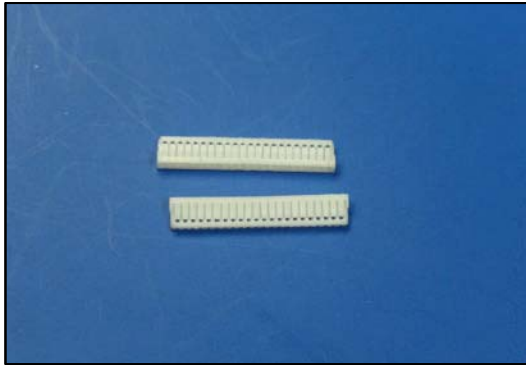

TERMINAL ASSEMBLY DRAWING

AWG#28-36

Dimensional & Ordering Information :

Circuits	Parts No.	Dimension mm		Q'ty/ Bag
		A	B	
02	1W0801HO0-02N	0.8	2.4	1,000
03	1W0801HO0-03N	1.6	3.2	1,000
04	1W0801HO0-04N	2.4	4.0	1,000
05	1W0801HO0-05N	3.2	4.8	1,000
06	1W0801HO0-06N	4.0	5.2	1,000
07	1W0801HO0-07N	4.8	6.4	1,000
08	1W0801HO0-08N	5.2	7.2	1,000
09	1W0801HO0-09N	6.4	8.0	1,000
10	1W0801HO0-10N	7.2	8.8	1,000
11	1W0801HO0-11N	8.0	9.6	1,000
12	1W0801HO0-12N	8.8	10.4	1,000
13	1W0801HO0-13N	9.6	11.2	1,000
14	1W0801HO0-14N	10.4	12.0	1,000
15	1W0801HO0-15N	11.2	12.8	1,000
16	1W0801HO0-16N	12.0	13.6	1,000
17	1W0801HO0-17N	12.8	14.4	1,000
18	1W0801HO0-18N	13.6	15.2	1,000
19	1W0801HO0-19N	14.4	16.0	1,000
20	1W0801HO0-20N	15.2	16.8	1,000
21	1W0801HO0-21N	16.0	17.6	1,000
22	1W0801HO0-22N	16.8	18.4	1,000

UL: Recognized NO. E306230