



Wire to Board
Connectors

Emboss
Type

SMT
Type

1W0801 Series
Wafer Vertical



Specifications:

1W


- Rated Voltage: 30V AC,DC
- Rated Current: 1.0A AC,DC
- Withstand Voltage: 200V AC/Minute
- Contact Resistance: 100mΩ (Max.)
- Insulation Resistance: 100MΩ (Min.)
- Temperature Range: -25°C~+85°C

Material:

- Base: High Temperature Plastic Natural UL 94V-0
- PIN: Phosphor Bronze, Tin-plated
- Solder tab: Phosphor Bronze, Tin-plated

Mates With:

- Mates With: 1W0801HO0-XX
1W0801HO0-XXB
1W0801HO0-XXN
1W0801HO0-XXBN

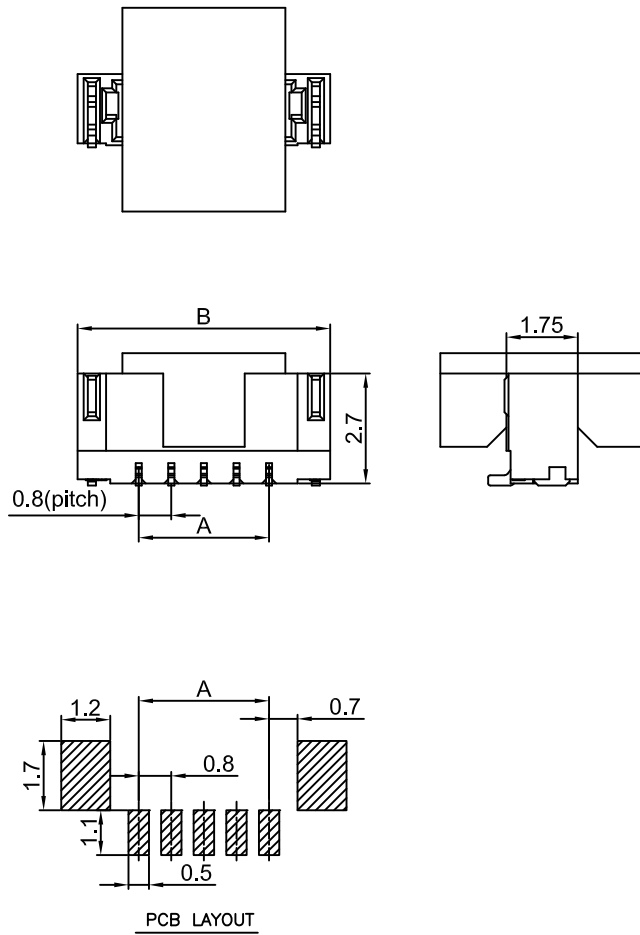

Dimensional & Ordering Information :

Circuits	Parts No.	Dimension mm		Reel/ Pcs
		A	B	
02	1W0801WOV0-02	0.8	3.8	3,500
03	1W0801WOV0-03	1.6	4.6	3,500
04	1W0801WOV0-04	2.4	5.4	3,500
05	1W0801WOV0-05	3.2	6.2	3,500
06	1W0801WOV0-06	4.0	7.0	3,500
07	1W0801WOV0-07	4.8	7.8	3,500
08	1W0801WOV0-08	5.6	8.6	3,500
09	1W0801WOV0-09	6.4	9.4	3,500
10	1W0801WOV0-10	7.2	10.2	3,500
11	1W0801WOV0-11	8.0	11.0	3,500
12	1W0801WOV0-12	8.8	11.8	3,500
13	1W0801WOV0-13	9.6	12.6	3,500
14	1W0801WOV0-14	10.4	13.4	3,500
15	1W0801WOV0-15	11.2	14.2	3,500
16	1W0801WOV0-16	12.0	15.0	3,500
17	1W0801WOV0-17	12.8	15.8	3,500
18	1W0801WOV0-18	13.6	16.6	3,500
19	1W0801WOV0-19	14.4	17.4	3,500
20	1W0801WOV0-20	15.2	18.2	3,500
21	1W0801WOV0-21	16.0	19.0	3,500
22	1W0801WOV0-22	16.8	19.8	3,500

UL: Recognized NO. E306230