

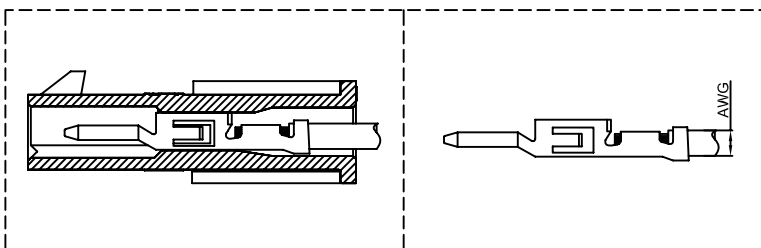
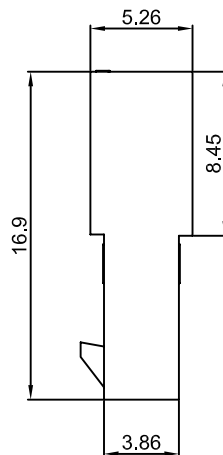


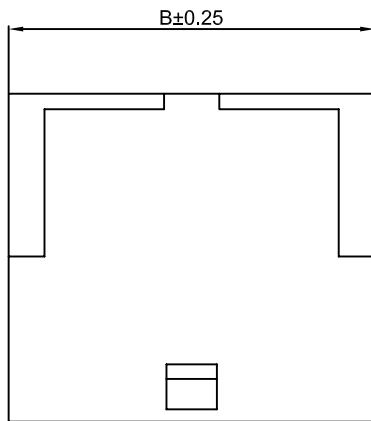

Wire to Wire
Connectors

Housing 2W3001 Series

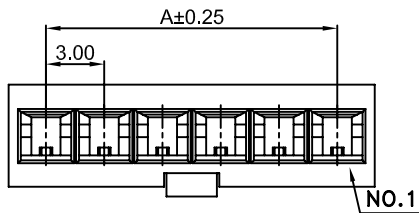

TERMINAL ASSEMBLY DRAWING

AWG:#20~#24

Specifications:

2W

- Rated Voltage: 250V AC,DC
- Rated Current: 5.0A AC,DC
- Withstand Voltage: 1500V AC/Minute
- Contact Resistance: 10mΩ (Max.)
- Insulation Resistance: 1,000MΩ (Min.)
- Temperature Range: -40°C~+105°C

Material:

- Color: Black
- PBT UL 94V-0

Use With:

- Use With: 2W3001TOMP-6/5

Mates With:

- Mates With: 2W3001HOM0-XXK

Dimensional & Ordering Information :

| Circuits | Parts No. | Dimension mm | | Q'ty/ Bag |
|----------|---------------|--------------|-------|--------------|
| | | A | B | |
| 02 | 2W3001HOF0-02 | 3.0 | 6.85 | 1,000 |
| 03 | 2W3001HOF0-03 | 6.0 | 9.85 | 1,000 |
| 04 | 2W3001HOF0-04 | 9.0 | 12.85 | 1,000 |
| 05 | 2W3001HOF0-05 | 12.0 | 15.85 | 1,000 |
| 06 | 2W3001HOF0-06 | 15.0 | 18.85 | 1,000 |
| 07 | 2W3001HOF0-07 | 18.0 | 21.85 | 1,000 |
| 08 | 2W3001HOF0-08 | 21.0 | 24.85 | 1,000 |
| 09 | 2W3001HOF0-09 | 24.0 | 27.85 | 1,000 |
| 10 | 2W3001HOF0-10 | 27.0 | 30.85 | 1,000 |
| 11 | 2W3001HOF0-11 | 30.0 | 33.85 | 1,000 |
| 12 | 2W3001HOF0-12 | 33.0 | 36.85 | 1,000 |