



Wire to Wire
Connectors

Housing 2W3001 Series

Specifications:

2W



- Rated Voltage: 250V AC,DC
- Rated Current: 5.0A AC,DC
- Withstand Voltage: 1500V AC/Minute
- Contact Resistance: 10m Ω (Max.)
- Insulation Resistance: 1,000M Ω (Min.)
- Temperature Range: -40°C~+105°C

Material:



- Color: Black
- PBT UL 94V-0

Use With:

- Use With: 2W3001TOMP-6/5


Mates With:

- Mates With: 2W3001HOM0-XXK

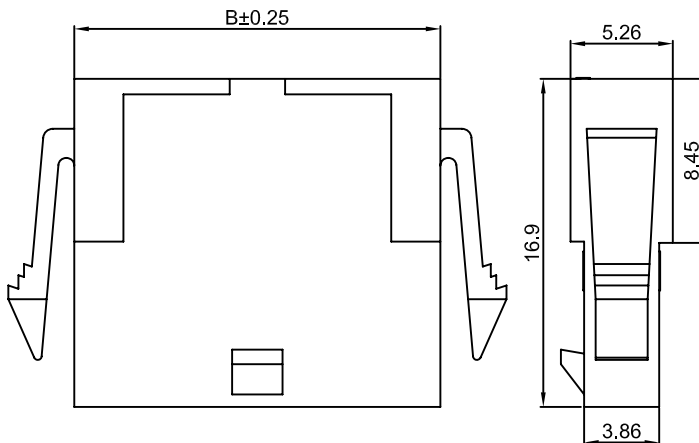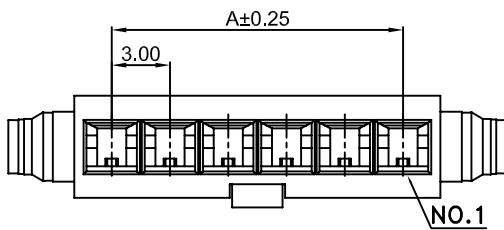

Dimensional & Ordering Information :

Cir- cuits	Parts No.	Dimension mm		Q'ty/ Bag
		A	B	
02	2W3001HOF0-02P	3.0	6.85	1,000
03	2W3001HOF0-03P	6.0	9.85	1,000
04	2W3001HOF0-04P	9.0	12.85	1,000
05	2W3001HOF0-05P	12.0	15.85	1,000
06	2W3001HOF0-06P	15.0	18.85	1,000
07	2W3001HOF0-07P	18.0	21.85	1,000
08	2W3001HOF0-08P	21.0	24.85	1,000
09	2W3001HOF0-09P	24.0	27.85	1,000
10	2W3001HOF0-10P	27.0	30.85	1,000
11	2W3001HOF0-11P	30.0	33.85	1,000
12	2W3001HOF0-12P	33.0	36.85	1,000

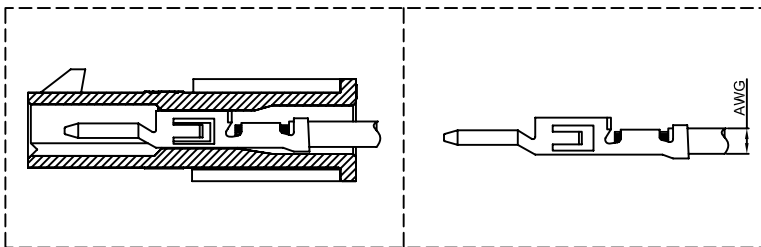

TERMINAL ASSEMBLY DRAWING

AWG:#20~#24

UL: Recognized NO. E306230